





PRIVACY BEAMS SOFFIT

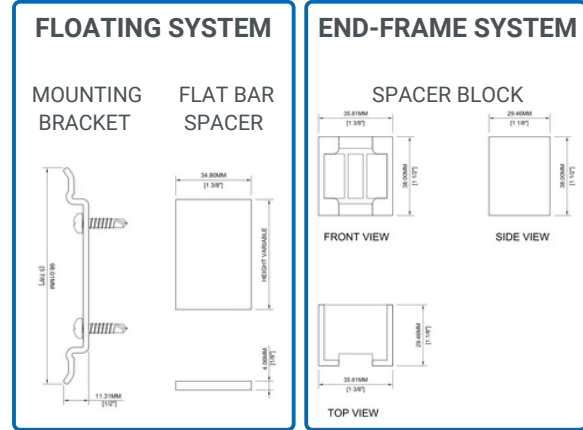

TYPICAL SECTIONS

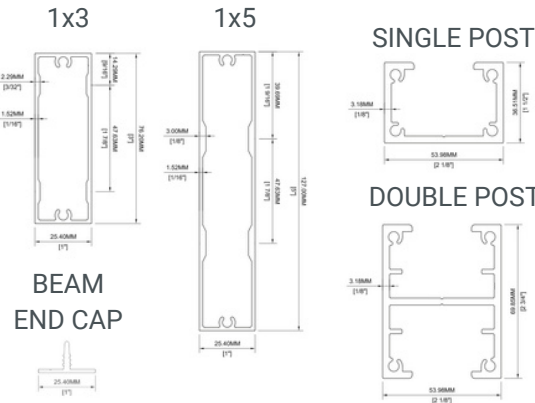

TYPICAL ISOMETRICS

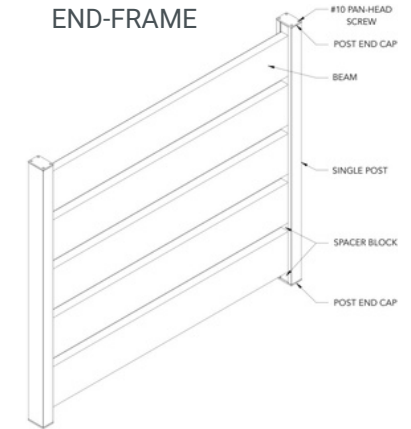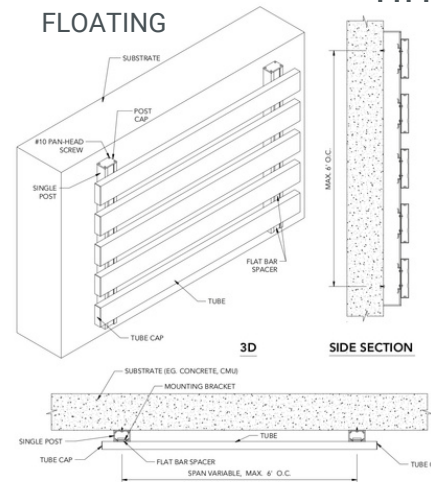

JAN 2021

PHYSICAL DATA

6063-T5 Extruded Aluminum
 100% Recyclable
 Warranty: Finish: 15 year (standard)/20 year* (ultra) (*10 week lead time); Aluminum: 50 year
 Weight (lbs/lf): 0.7 (1x3); 1.1 (1x5)

TESTING

ICC-ES Evaluation Report - Division: 05 00 00 - Metals
 Section: 05 50 00 - Metal Fabrications
 LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES reports as proof of compliance

Florida Building Code - Building
 Florida Building Code - Residential

WUI (The Wildland-Urban Interface) – California Department of Forestry & Fire Protection Office of the State Fire Marshal Listing No. 8140-2286:0500

Fire Rating: Class A Non-Combustible by ASTM E136 & ASTM E84

PROFILES

1x3, 1x5 - standard lengths: 24'

COMPONENTS

Single Post, Double Post - standard lengths: 24'
 Beam End Cap, Post End Cap - units (20pcs)
 Flat Bar Spacer (1"), Flat Bar (12'), Mounting Bracket - units (100pcs)
 Spacer Block - units (100pcs)

FINISHES

Woodgrains, Solid, Specialty
 Custom Solid Colour Matching (Additional Lead Times Apply)
 ☀️ Light Reflectance: 5% (Black) up to 73.2% (Ultra White)

ATTACHMENT

Floating System, End-Frame System

BIM & CAD

RVT & DWG files available, see website for details

LEAD TIME

3-4 weeks (subject to change)