
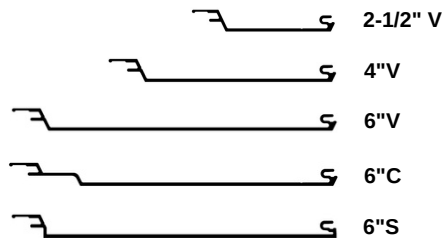
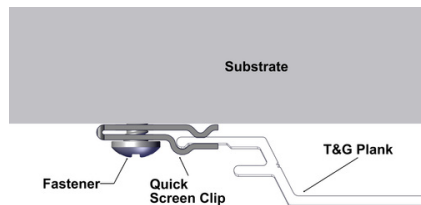


TONGUE & GROOVE

SOFFIT SYSTEM

TYPICAL ISOMETRIC

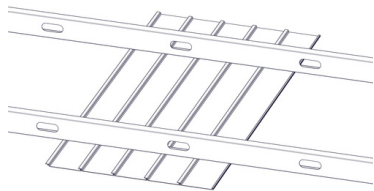

PROFILES

V-Groove: 2-1/2", 4", 6"
 V-Groove Perforated: 2-1/2", 6"
 Smooth: 6"
 Smooth Perforated: 6"
 Channel: 6"
 Standard Lengths: 24', 2-1/2"(12")
 96 SQ FT/box

COMPONENTS - Standard Lengths: 12'

Traditional: Starter Strip, Back-to-Back Starter Strip, 2"
 Corner Set, 1-3/8" Two Piece J-Track, 1-3/8"
 Termination Set, Compression Joint (24"), 1-1/2" Flat
 Reveal Set, 1-1/2" U-Reveal Set, 1-1/2" T&G U-
 Reveal

Craftsman: 7/8" J-Track, 3/4" Inside Corner, 1" Outside
 Corner, 3/4" U-Reveal Set, 3/4" T&G U-Reveal

Precision: 5/8" Starter J-Track, 3/16" Outside Corner,
 5/8" J-Track, 5/8" Two Piece J-Track, 5/8" Termination
 Set, 1/2" Flat Reveal, 1/2" T&G Flat Reveal

T&G_SO_IS_RF_V7

FINISHES

Woodgrains, solid color, naturally aged metal, custom solid colour matching
 (additional lead times apply)

ATTACHMENT

Planks: Quick-screen clips w. #10 Pan Head screws* @ 32" o.c. (standard).
 Quick-screen clips included: 135 pcs/4" box, 90 pcs/6" box.
 Trims: hard fasten w. #10 Pan Head screws* @ 16" o.c. *Screws not included.

BIM & CAD

RVT & DWG files available, see
 website for details

LEAD TIME

Most Popular Finishes
 -ready to ship within 1 week
 Additional Finishes
 -ready to ship within 14 weeks

TECHNICAL SPECIFICATIONS

PHYSICAL DATA

6063-T5 Extruded Aluminum
 100% Recyclable
 Warranty: Finish:15 year (standard)/20 year* (ultra) (*10 week lead time);
 Aluminum: 50 year
 Weight (lbs/sqft): ~1.5
 2-1/2" Perforated Planks provide 15% open area
 6" Perforated Planks provide 21% open area


TESTING


ICC-ESR 4182 Evaluation Report - Division: 07 00 00 Thermal and Moisture
 Protection Section: 07 46 00 - Siding


LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES
 reports as proof of compliance

Florida Product Code: FL41776

WUI (The Wildland-Urban Interface) – California Department of Forestry & Fire
 Protection Office of the State Fire Marshal Listing No. 8140-2286:0500

 **Fire Rating:** Class A Non-Combustible by ASTM E136 & ASTM E84 ;
 A2-s1,d0 by EN 13501-1

 **Light Reflectance:** 5% (Black) up to 73.2% (Ultra White)

 **Wind load:** Up to 121 psf (5794 Pa) TAS 202, TAS 203



info@longboardproducts.com

longboardproducts.com

800 604 0343