
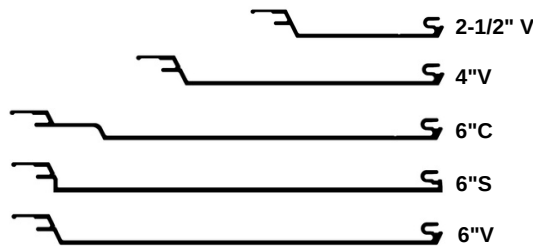
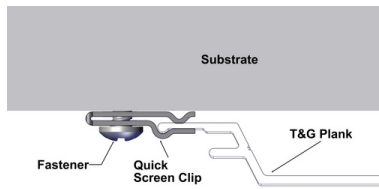


# ENDURA CEILING SYSTEM

## TYPICAL ISOMETRIC



## PROFILES

### Perforated:

(6\"/>

- V-groove: 2-1/2\"/>

### Non-perforated:

- V-groove: 2-1/2\"/>

## COMPONENTS - Standard Lengths: 12'

**Traditional:** Back-to-Back Starter, Starter, 1-3/8\"/>

**Craftsman:** 3/4\"/>

**Precision:** 5/8\"/>

ECS\_IS\_RC\_V5

1. 12' lengths,  
20 FT<sup>2</sup> per box

2. 12' lengths,  
48 FT<sup>2</sup> per box

3. 24' lengths,  
96 FT<sup>2</sup> per box

## FINISHES

Woodgrains, solid color, naturally aged metal, custom solid color matching (additional lead times apply)

## ATTACHMENT

Planks: Quick-screen clips w. #10 Pan Head screws\* @ 32\"/>

Quick-screen clips included: 135 pcs/4\"/>

Trims: hard fasten w. #10 Pan Head screws @ 16\"/>

## BIM & CAD

RVT & DWG files available, see website for details

## LEAD TIME

Most Popular Finishes

-ready to ship within 1 week

Additional Finishes

-ready to ship within 14 weeks

## TECHNICAL SPECIFICATIONS

### PHYSICAL DATA

6063-T5 Extruded Aluminum

100% Recyclable

Warranty: Finish:15 year (standard)/20 year\* (ultra) (\*10 week lead time);

Aluminum: 50 year

Weight (lbs/sqft): ~1.5

2-1/2\"/>

6\"/>

### TESTING

- ICC-ESR 4182 Evaluation Report - Division: 07 00 00 Thermal and Moisture Protection Section: 07 46 00 - Siding

CAN/ULC S102

CAN/ULC S114

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES reports as proof of compliance

WUI (The Wildland-Urban Interface) – California Department of Forestry & Fire Protection Office of the State Fire Marshal Listing No. 8140-2286:0500



**Fire Rating:** Class A Non-Combustible by ASTM E136 & ASTM E84



**Acoustical Rating with insulation:** NRC up to 0.95



**Light reflectance (LRV):** Up to 73.2% (Ultra White)



[info@longboardproducts.com](mailto:info@longboardproducts.com)

[longboardproducts.com](http://longboardproducts.com)

800 604 0343