

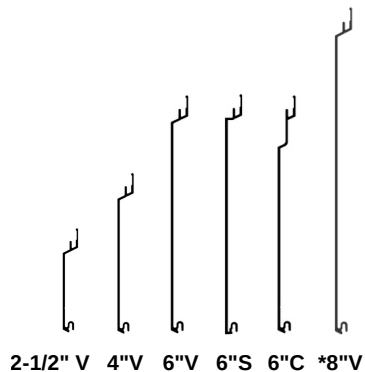


TONGUE & GROOVE CLADDING SYSTEM



TYPICAL ISOMETRIC

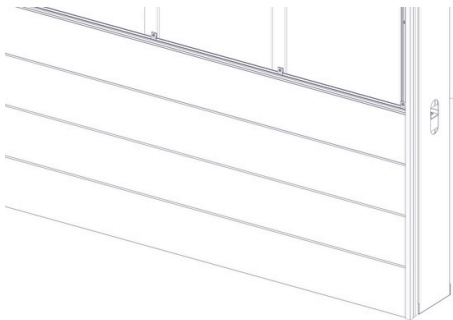

PROFILES

V-Groove: 2-1/2", 4", 6", 8"

Smooth: 6"

Channel: 6"

Standard Lengths:

12' for 2-1/2"

24' for 4", 6", 8"

COMPONENTS - Standard Lengths: 12'

Traditional: Starter Strip, Back-to-Back Starter Strip, 2"

Corner Set, 1-3/8" Two Piece J-Track, 1-3/8"

Termination Set, Compression Joint (24"), 1-1/2" Flat

Reveal Set, 1-1/2" U-Reveal Set, 1-1/2" T&G U-

Reveal, 2" Offset Flat Reveal

Craftsman: 7/8" J-Track, 3/4" Inside Corner, 1" Outside
Corner, 3/4" U-Reveal Set, 3/4" T&G U-Reveal

Precision: 5/8" Starter J-Track, 3/16" Outside Corner,
5/8" J-Track, 5/8" Two Piece J-Track, 5/8" Termination
Set, 1/2" Flat Reveal, 1/2" T&G Flat Reveal

FINISHES

Woodgrains, solid color, naturally aged metal, custom solid color matching

(additional lead times apply) *8" V Groove, 12ft lengths available in all finishes.

*8" V Groove, 24ft lengths available in woodgrains only.

ATTACHMENT

Planks: Quick-screen clips w. #10 Pan Head screws* @ 32" o.c. (standard).

- Quick-screen Clips: Included in order for 32" o.c. spacings, purchase extra for 16" o.c. spacings.
For purchase (extra): 100 pcs/Bag, 1500 pcs/Box

Trims: Hard fasten w. #10 Pan Head screws* @ 16" o.c. *Screws not included.

BIM & CAD

RVT & DWG files available, see
website for details



info@longboardproducts.com

longboardproducts.com

800 604 0343

TECHNICAL SPECIFICATIONS

PHYSICAL DATA

6063-T5 Extruded Aluminum

100% Recyclable

Warranty: Finish: 15 year (standard)/20 year* (ultra) (*10 week lead time);

Aluminum: 50 year

Weight (lbs/sqft): ~1.5

TESTING

ICC-ESR 4182 Evaluation Report - Division: 07 00 00 Thermal and Moisture
Protection Section: 07 46 00 - Siding

AAMA 509 Rainscreen: W1, V2

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES
reports as proof of compliance

WUI (The Wildland-Urban Interface) - California Department of Forestry & Fire
Protection Office of the State Fire Marshal Listing No. 8140-2286:0500



Fire Rating: Class A Non-Combustible by ASTM E136 & ASTM E84 ;
A2-s1,d0 by EN 13501-1



Light Reflectance: 5% (Black) up to 73.2% (Ultra White)



Wind load: Up to 121 psf (5794 Pa) TAS 202, TAS 203