



# PRIVACY BEAM SOFFIT


## TYPICAL ISOMETRICS

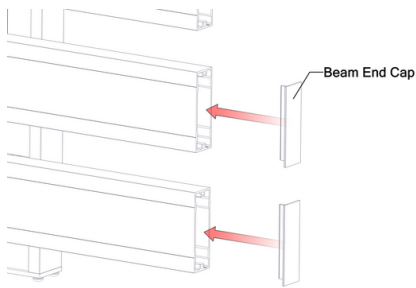


## SINGLE POST



1x3"



1x5"



BEAM END CAP

## PROFILES

1x3", 1x5" - Standard Lengths: 24'

## COMPONENTS

Single Post, -Standard 24'  
Beam End Cap, Post End Cap - (20pcs)  
Spacer Bar (1", 12'), Spacer Block (100pcs)  
Mounting Bracket - (100pcs)

## FINISHES

Woodgrains, solid colors, naturally aged metals, special order. Custom solid color matching available (additional lead times apply).

PB\_SO\_IS\_RC\_V3

## ATTACHMENT

Floating System attached with Mounting Brackets, End Frame System placed in posts and supported with Spacer Blocks  
Spacer Bar - comes in 12ft lengths -cut for variable heights  
Spacer Block - 1-1/2" spacer

## BIM & CAD

RVT & DWG files available,  
see website for details

## LEAD TIME

Most Popular Finishes  
-ready to ship within 1 week  
Additional Finishes  
-ready to ship within 14 weeks



[info@longboardproducts.com](mailto:info@longboardproducts.com)  
[longboardproducts.com](http://longboardproducts.com)  
800 604 0343

## TECHNICAL SPECIFICATIONS

### PHYSICAL DATA

6063-T5 Extruded Aluminum  
100% Recyclable  
Warranty: Finish:15 year (standard)/20 year\* (ultra) (\*10 week lead time);  
Aluminum: 50 year  
Weight (lbs/lf): 0.7 (1X3); 1.1 (1X5)

### TESTING

ICC-ESR 4183 Evaluation Report - Division: 05 00 00 - METALS  
• Section: 05 50 00 - Metal Fabrications

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES reports as proof of compliance

Florida Product Code: FL42008

Florida Building Code: Building  
Florida Building Code: Residential

WUI (The Wildland-Urban Interface) - California Department of Forestry & Fire Protection Office of the State Fire Marshall Listing No. 8140-2286:0500



**Fire Rating:** Class A Non-Combustible by ASTM E136 & ASTM E84



**Light reflectance (LRV):** 5% (Black) Up to 73.2% (Ultra White)