




**LONGBOARD®**  
INSPIRING ARCHITECTURE

# Tongue & Groove Planks

Materials Estimate Guide

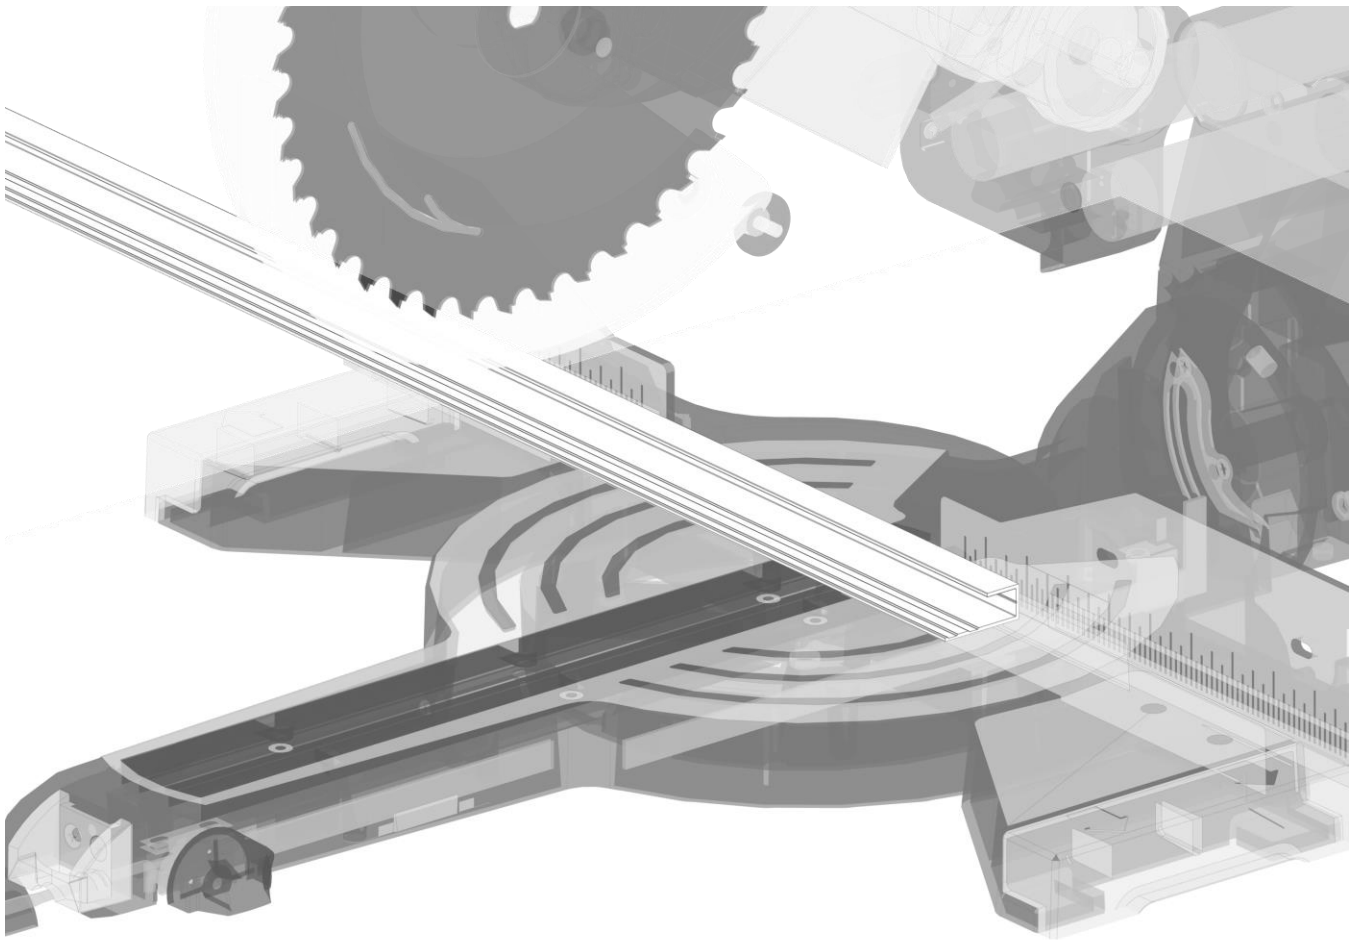

## Materials Estimate Details

### Box Quantities

- 2-1/2" Planks, 12' (3.7m) Box – 20 SQ FT/Box
- 4" & 6" Planks, 12' (3.7m) Box – 48 SQ FT/Box
- 4" & 6" Planks, 24' (7.3m) Box – 96 SQ FT/Box
- Trim Components, 12' Box – Sold Per piece

Note: Quick-Screen Clips are included for 32" O.C. attachment (16" O.C. for FL, HI & AK) – see installation guidelines for wind load tables.

### Overage

- Typical Plank waste – 10%
- Typical Trim Component waste – 15%

## Typical Trim Component Guide: standard terms and liability release

This guide serves to aid in the standard application of trim components, for typical installations. Always be sure to understand and follow installation guides: [longboardproducts.com/installation](http://longboardproducts.com/installation) and reach out to your Longboard representative for support.

Install product in accordance with the manufacturer's written instructions, including technical bulletins, info sheets and install videos with positive anchorage to the building and provide for thermal movement. Install screw fasteners using power tools having controlled torque settings to avoid damage or deformation of the screw heads, screw threads, substrate or cladding system.




Scan For Guide

When not provided, design wind pressure is assumed to be 30 PSF maximum. Please refer to the install guide for wind load attachment requirements as additional attachment accessories like Quick Screen Clips might be required.

Longboard® Architectural Products (Longboard) provides no guarantee as to the accuracy, completeness or quality of the information contained within this guide. Longboard is not responsible for any errors or omissions and does not accept liability for any claim, loss, expense, damage or cost that may be incurred as result of any reliance placed upon it.


No person is authorized to make any representation or guarantee on behalf of Longboard except as expressly set forth above, and any such statement shall not be binding on Longboard. Except as expressly set forth above, Longboard makes no guarantee of any kind, express or implied, including, without limitation, any implied fitness for a particular purpose.

# T&G Cladding Component Layout

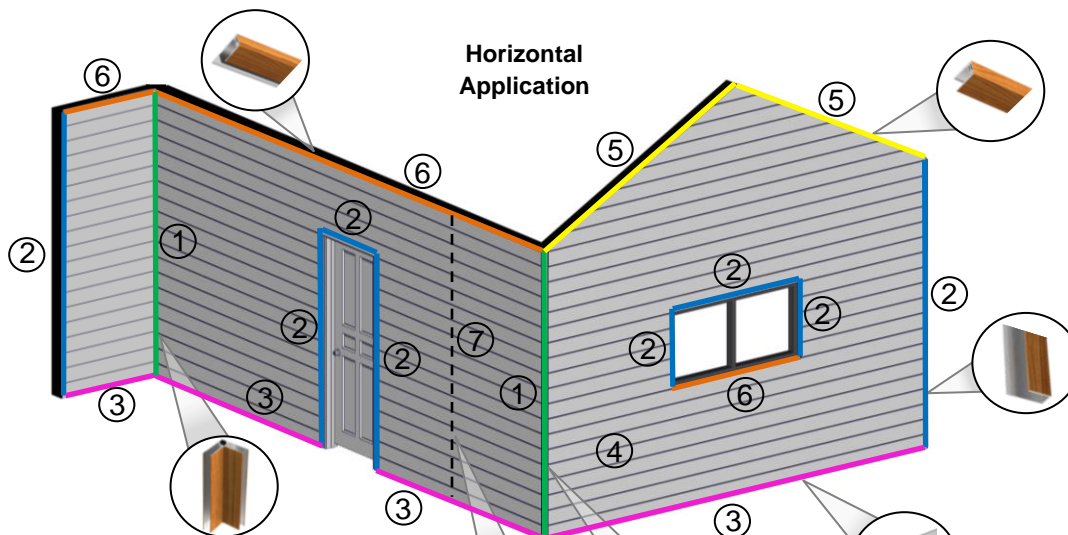

**Legend:**

- 1. Traditional Corner Set (2")
  - 2. Craftsman J-Track (7/8")
  - 3. Traditional Starter Strip (1-7/8")
  - 4. Planks (2-1/2", 4", 6")
  - 5. Craftsman Two-Piece J-Track (7/8")
  - 6. Craftsman Termination Set (7/8")
  - 7. Traditional Flat Reveal Set (1-1/2")
- ⑦ Use Reveal Sets perpendicular to planks when runs are greater than 24ft or 40ft with one butt-joint.

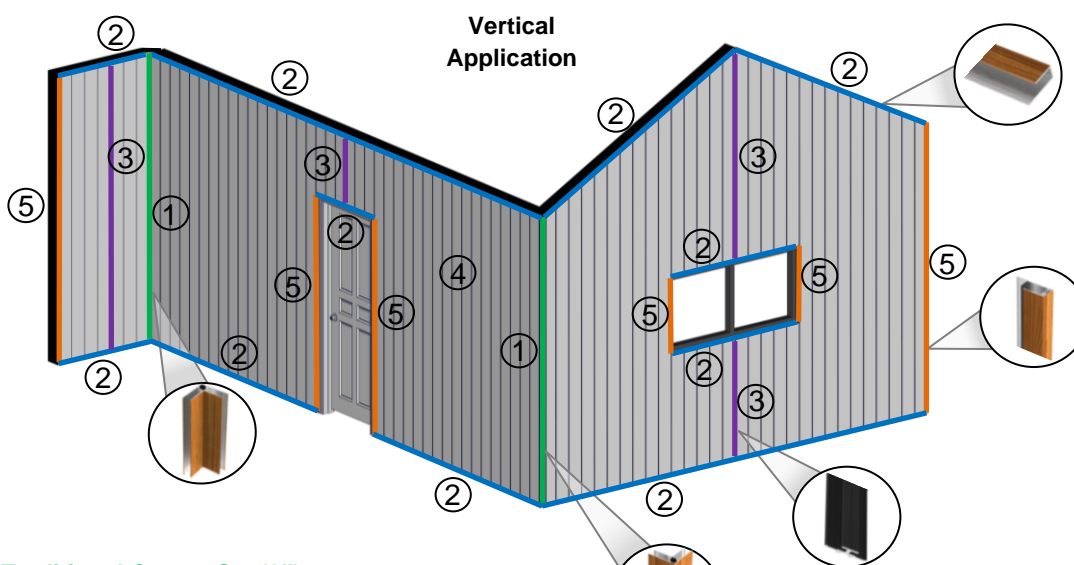


**Legend:**

- 1. Traditional Corner Set (2")
- 2. Craftsman J-Track (7/8")
- 3. Traditional Back-to-Back Starter Strip (1-1/4")
- 4. Planks (2-1/2", 4", 6")
- 5. Craftsman Termination Set (7/8")

# T&G Soffit Component Layout

## Soffit Parallel Application

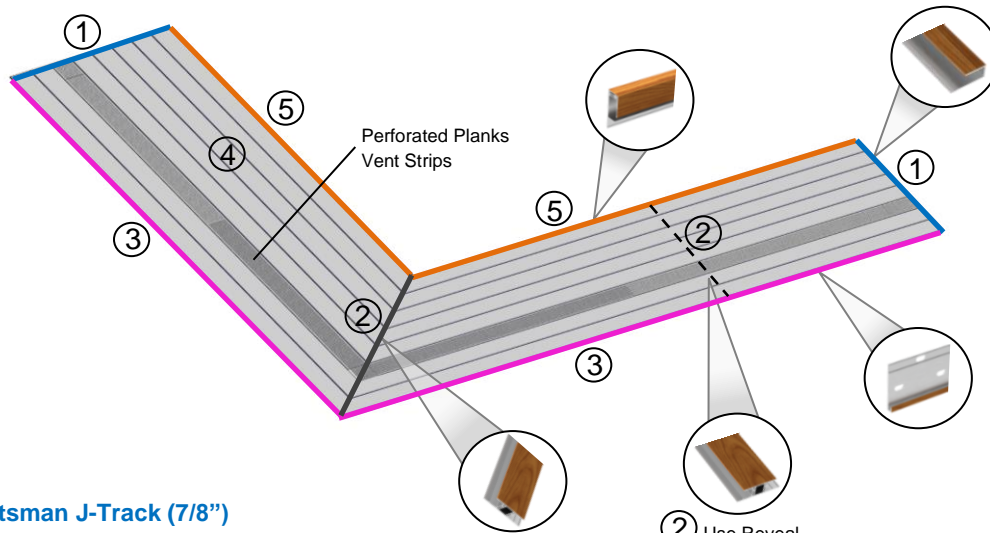


**Legend:**

- 1. Craftsman J-Track (7/8")
- 2. Traditional Flat Reveal Set (1-1/2")
- 3. Traditional Starter Strip (1-7/8")
- 4. Planks (2-1/2", 4", 6")
- 5. Craftsman Termination Set (7/8")

② Use Reveal Sets perpendicular to planks when runs are greater than 24ft or 40ft with one butt-joint.

## Soffit Perpendicular Application

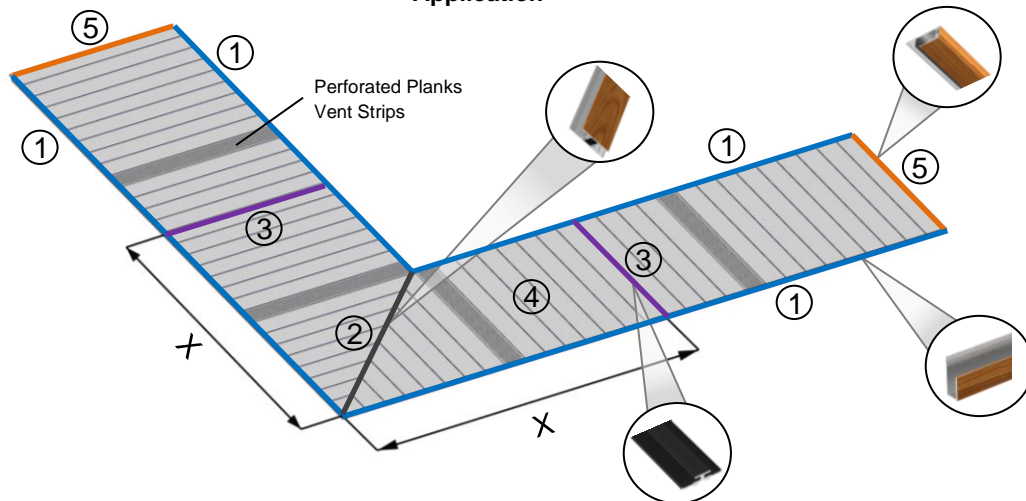

**Legend:**

- 1. Craftsman J-Track (7/8")
- 2. Traditional Flat Reveal Set (1-1/2")
- 3. Traditional Back-to-Back Starter Strip (1-1/4")
- 4. Planks (2-1/2", 4", 6")
- 5. Craftsman Termination Set (7/8")